



Pedestrian Friendly, Environmentally Advanced

The Aqua-Bricloc®

Advanced Pavement Technology presents Aqua-Bricloc® — a versatile new shape in permeable pavers used when implementing the Bio-Aquifer Storm System (BASS™), a superior paving solution that supports stormwater management and business growth. This paver meets ADA standards for opening size, but it is also designed to handle extremely heavy traffic loads (similar to port applications or heavy-duty truck loading and parking lots).


See back side for more information.

Aqua-Bricloc® is a patented design paver, available only from Advanced Pavement Technology. Made according to ASTM C936 specifications, the pavers can be produced in a variety of custom colors and installed using manual or mechanical methods. The new paver shape can also be combined with other shapes during installation to achieve a number of attractive patterns in an ecological pavement system.™

Aqua-Bricloc®

Dimensions:

Nom. 4½" x 9" x 3 ⅝"

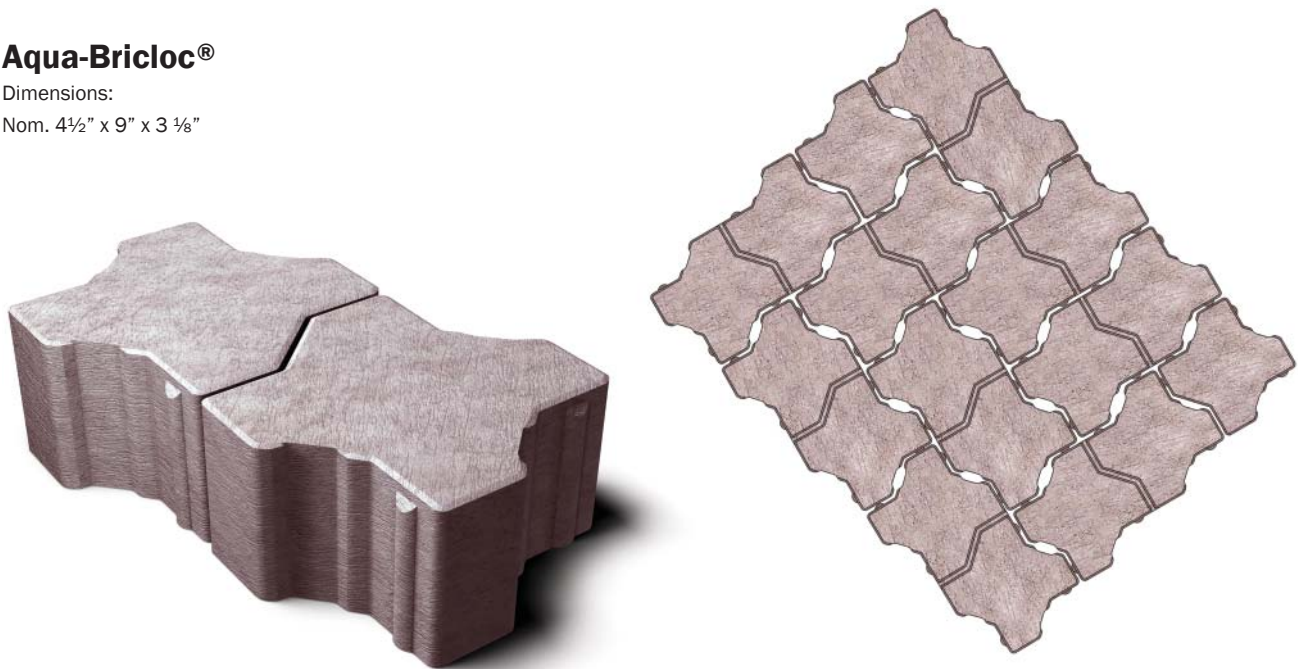


When used as part of Advanced Pavement Technology's exclusive BASS™ method, these pavers allow for natural stormwater drainage and groundwater recharge, making the paved surface ecologically sound and economically smart. In fact, the BASS™ method is an acceptable post-structural Best Management Practice (BMP) used to meet the federal stormwater management requirements. Roads and parking lots created using BASS™ with these permeable pavers qualify for LEED credits and offer vast benefits:

- Meeting EPA stormwater requirements with a superior solution
- Achieving significant savings through enhanced land planning
- Outperforming other systems in harsh climates or with freeze/thaw cycles
- Delivering maximum strength to handle heavy vehicular traffic
- Producing remarkable curb appeal and convenient maintenance access
- Providing outstanding results on a 50-year life-cycle cost analysis

Aqua-Bricloc®, **Aqua-Bric®**, **Aqua-Loc™** and **Eco-Brick™** are licensed shapes, available only from Advanced Pavement Technology or selected national manufacturers. The pavers are manufactured according to ASTM C936 specifications. They can be produced in a variety of custom colors and installed using manual or mechanical methods. The new paver shapes can also be combined during installation to achieve a number of attractive patterns in an ecological pavement system.

Bio-Aquifer Storm System™

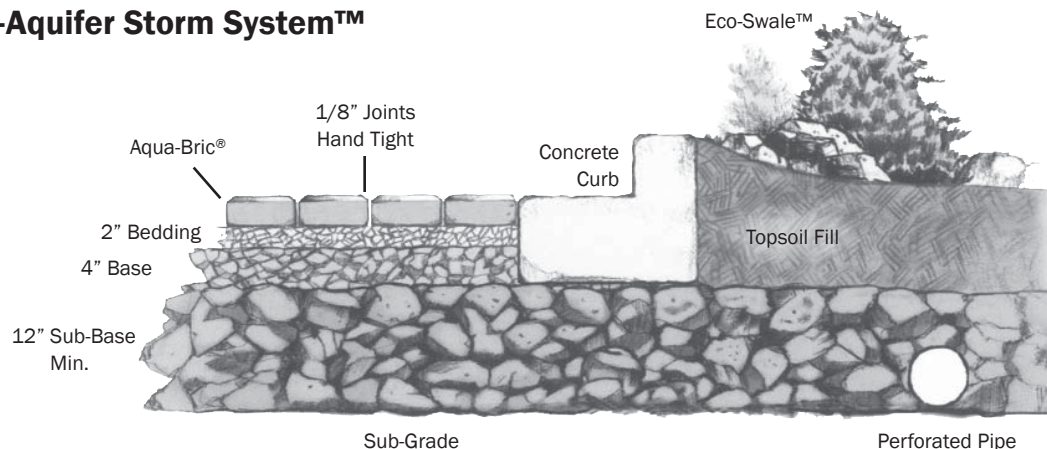

Ecologically sound. Economically smart. And exclusively from Advanced Pavement Technology.

For more information about the BASS™ program, please contact Advanced Pavement Technology toll-free at (877) 551-4200 or visit our website at www.advancedpavement.com.



Ecological Paver Systems Division

67 Stonehill Road | Oswego, Illinois 60543

Toll-free (877) 551-4200 | (630) 551-4200 | Fax (630) 551-4225

crt@advancedpavement.com | pat@advancedpavement.com

www.advancedpavement.com

